


产品介绍



C - HO - 14 - 50 - A1

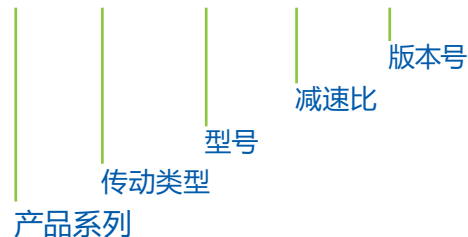

产品系列

- C - 组件型
- B - 组合型
- SB - 简易组合型

传动类型

- SO - 实心轴 帽型柔轮
- SC - 实心轴 杯型柔轮
- HO - 中空轴 帽型柔轮
- HC - 中空轴 杯型柔轮
- MO - 电机轴 帽型柔轮
- MC - 电机轴 杯型柔轮

型号与减速比

传动比 尺寸	50	80	100	120	160
14 (35)	x	x	x		
17 (42)	x	x	x	x	
20 (50)	x	x	x	x	x
25 (63)	x	x	x	x	x
32 (80)	x	x	x	x	x

全系列产品技术参数


型号	减速比	最大输出 扭矩	允许输出 扭矩	额定输出 扭矩	急停转矩	最高输入 转速	额定输入 转速
		Nm	Nm	Nm	Nm	r/min	r/min
14 (35)	50	18	6,9	5,4	35	6000	3500
	80	23	11	7,8	47		
	100	28	11	7,8	54		
17 (42)	50	34	26	16	70	6000	
	80	43	27	22	87		
	100	54	39	24	110		
	120	54	39	24	86		
20 (50)	50	56	34	25	98	6000	
	80	74	47	34	127		
	100	82	49	40	147		
	120	87	49	40	147		
	160	92	49	40	147		
25 (63)	50	98	55	39	186	5600	
	80	137	87	63	255		
	100	157	108	67	284		
	120	167	108	67	304		
	160	176	108	67	314		
32 (80)	50	216	108	76	382	4800	
	80	304	167	118	568		
	100	333	216	137	647		
	120	353	216	137	686		
	160	372	216	137	686		

以上参数值为计算值，最终参数值会根据最终测试结果进行调整。



C-MC-20-120-A1

组件型, 杯型柔轮




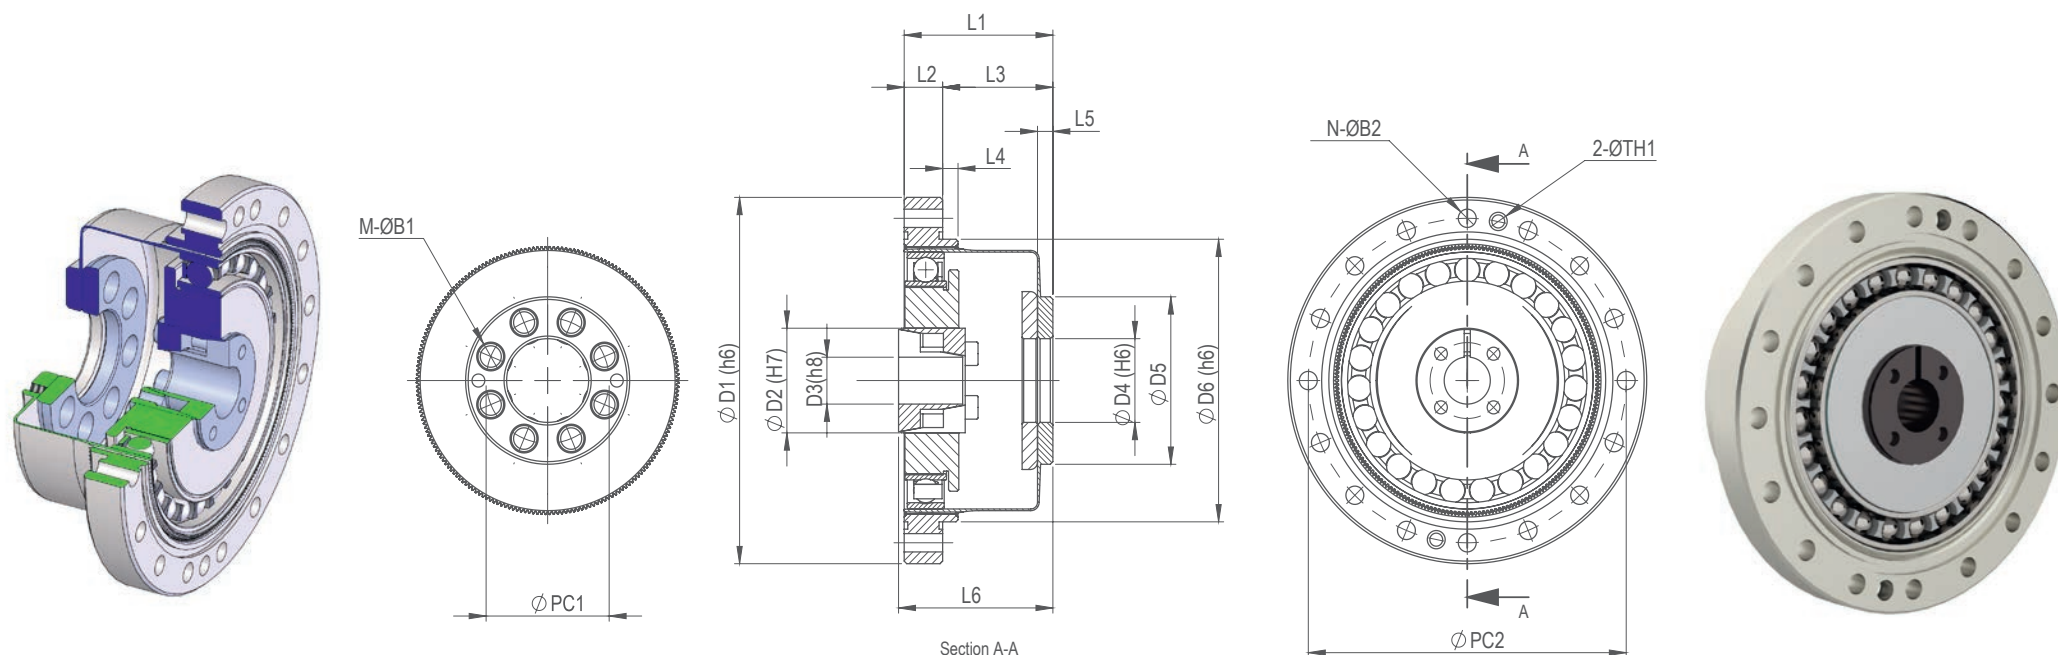


型号	ØPC1	M	ØB1	ØPC2	N	ØB2	TH1	ØD1	ØD2	ØD3	ØD4	ØD5	ØD6	L1	L2	L3	L4	L5	L6
14 (35)	Ø17	6	Ø4,5	Ø44	8 (12)	Ø3,5	M3	Ø50	Ø16	Ø6	Ø11	Ø23	Ø38	23,5	6	17,5	2	2,4	25
17 (42)	Ø19	6	Ø5,5	Ø54	16 (12)	Ø3,5	M3	Ø60	Ø18	Ø8	Ø10	Ø27	Ø47	26,5	6,5	20	2,5	3	28
20 (50)	Ø24	8	Ø5,5	Ø62	16 (12)	Ø3,5	M3	Ø70	Ø20	Ø9	Ø16	Ø32	Ø54	29	7,5	21,5	3	3	30
25 (63)	Ø30	8	Ø6,6	Ø77	16 (12)	Ø4,5	M4	Ø85	Ø22	Ø11	Ø20	Ø40	Ø67	34	10	24	3	3	34
32 (80)	Ø40	8	Ø9	Ø100	16 (12)	Ø5,5	M5	Ø110	Ø26	Ø14	Ø26	Ø52	Ø88	42	14	28	3	3,2	42



B-MC-25-100-A1

组合型, 杯型柔轮

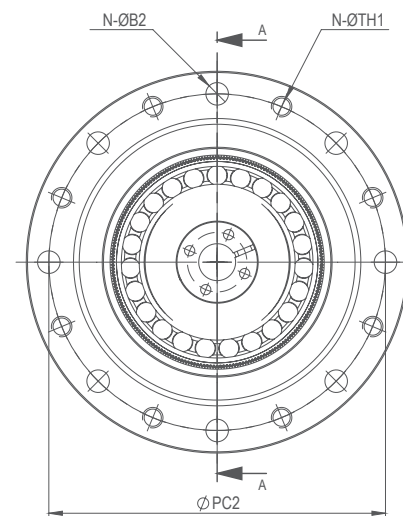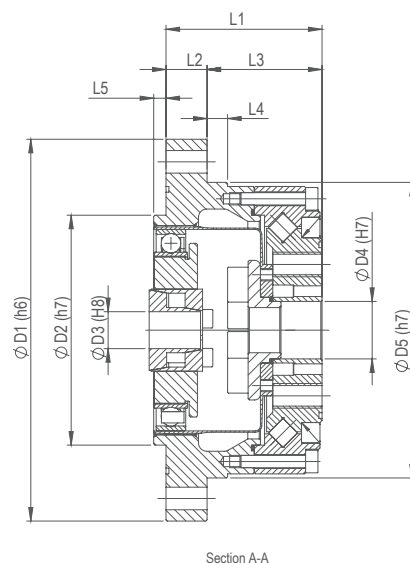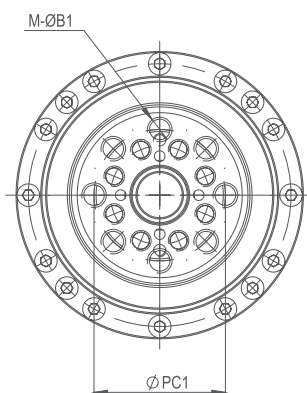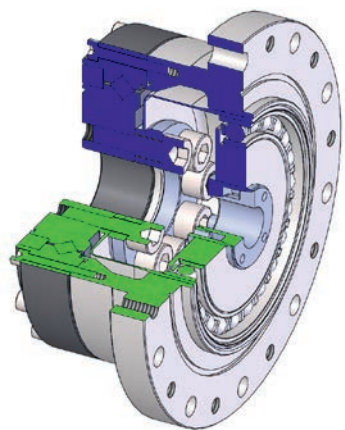


型号	ØPC1	M	ØB1	ØPC2	N	ØB2	TH1	ØD1	ØD2	ØD4	ØD5	L1	L2	L3	L4	L5
14 (35)	Ø23	6	M4	Ø65	8 (6)	Ø4,5	M4	Ø73	Ø38	Ø6	Ø11	34	7	27	3,5	2
17 (42)	Ø27	6	M5	Ø71	8 (6)	Ø4,5	M4	Ø79	Ø48	Ø8	Ø10	36,5	8	28,5	4	2
20 (50)	Ø32	8	M6	Ø82	8 (6)	Ø5,5	M5	Ø93	Ø56	Ø9	Ø14	38	10	28	5	3
25 (63)	Ø42	8	M8	Ø96	10 (8)	Ø5,5	M5	Ø107	Ø67	Ø11	Ø20	46	10	36	5	3
32 (80)	Ø55	8	M10	Ø125	12	Ø6,5	M6	Ø138	Ø90	Ø14	Ø26	58,5	12	46,5	5	3



SB-HO-25-100-A1

简易组合型, 帽型柔轮




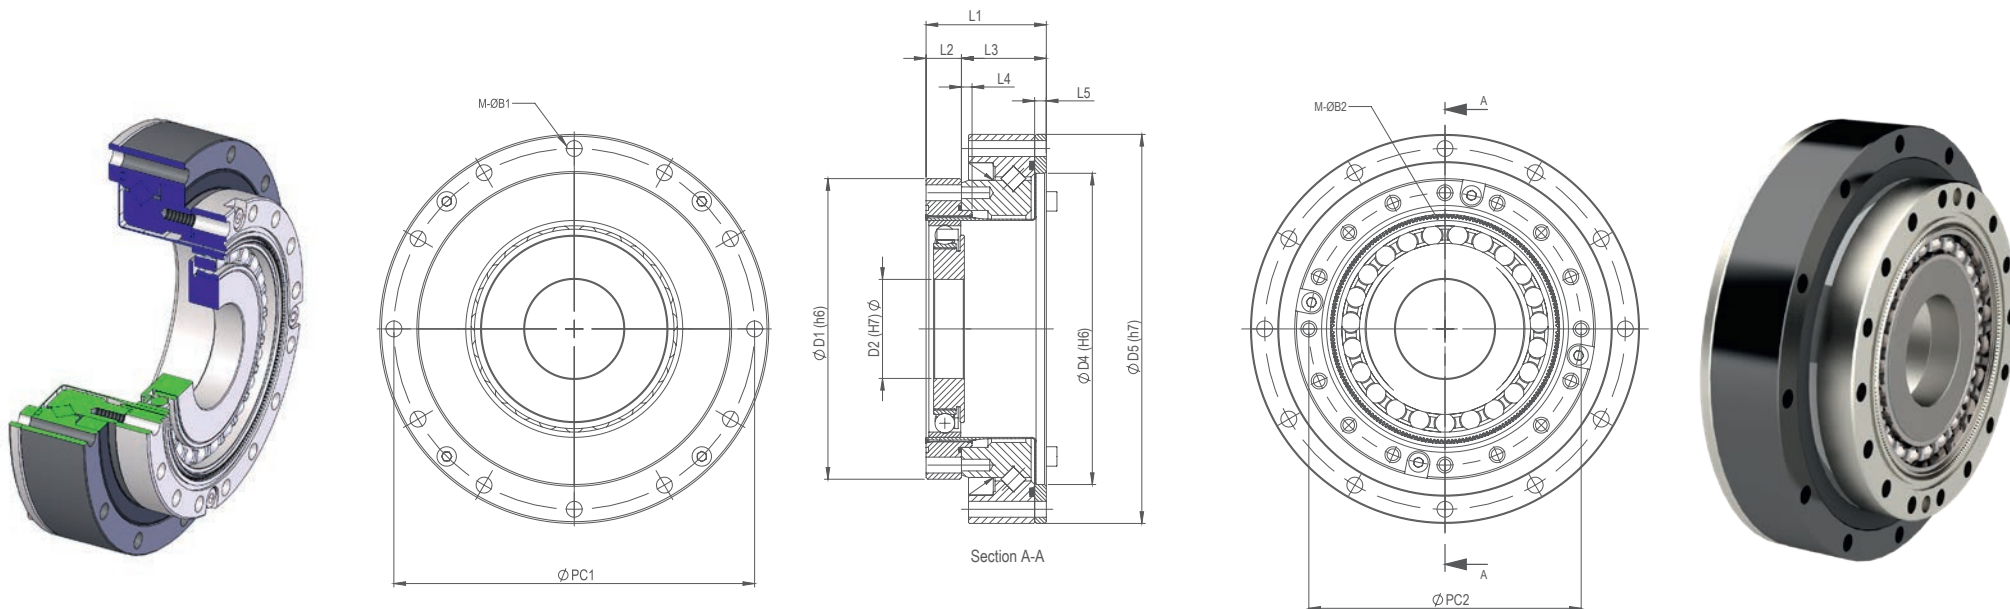


型号	ØPC1	M	ØB1	ØPC2	N	ØB2	TH1	ØD1	ØD2	ØD4	ØD5	L1	L2	L3	L4	L5
14 (35)	Ø64	8	Ø3,5	Ø44	12	Ø3,5	M3	Ø50	Ø17	Ø48	Ø70	23,5	6	17,5	2	2,4
17 (42)	Ø74	12	Ø3,5	Ø54	20	Ø3,5	M3	Ø60	Ø20	Ø60	Ø80	26,5	6,5	20	2,5	3
20 (50)	Ø84	12	Ø3,5	Ø62	16	Ø3,5	M3	Ø70	Ø23	Ø70	Ø90	29	7,5	21,5	3	3
25 (63)	Ø102	12	Ø4,5	Ø77	16	Ø4,5	M3	Ø85	Ø28	Ø88	Ø110	34	10	24	3	3,3
32 (80)	Ø132	12	Ø5,5	Ø100	16	Ø5,5	M4	Ø110	Ø36	Ø114	Ø142	42	14	28	3	3,6



INW-14/17/20

关节模组 (协作机器人)

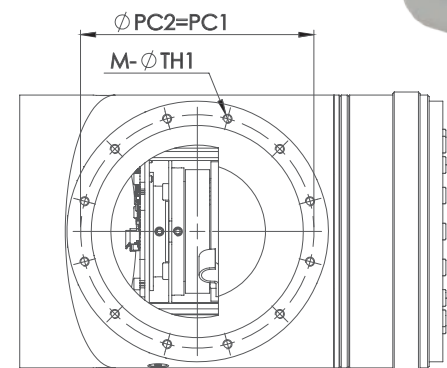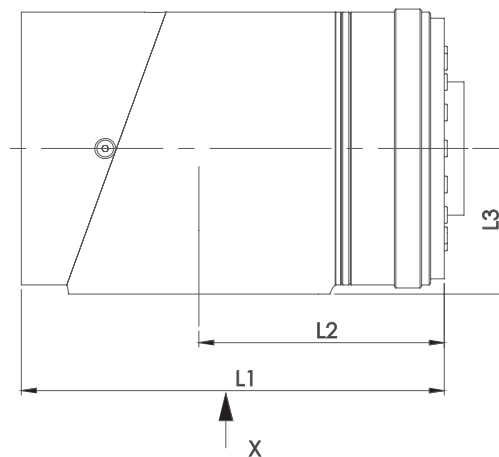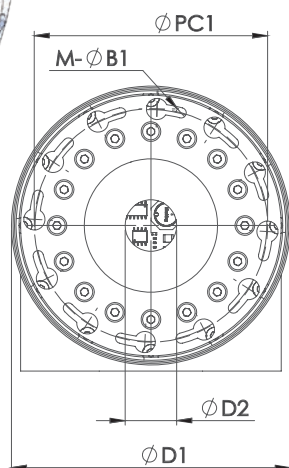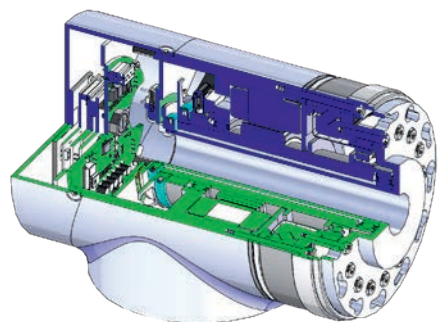

View X



型号	ØPC1 [mm]	M [mm]	B1 [mm]	ØTH1 [mm]	D1 [mm]	D2 [mm]	L1 [mm]	L2 [mm]	L3 [mm]	重量 [kg]	最大输入 转速 [1/min]	最大电 压 V DC	最大电 流 [A]	最大功 率 [W]
14 (35)	Ø64	8	Ø3,4	M3	72	12	112	61	38,5	1,15	2800	48	3,7	177
17 (42)	Ø69	12	Ø3,4	M3	82	14	136	75	44	1,90	3382	48	5,2	250
20 (50)	Ø77	12	Ø3,4	M3	92	17	140	81	48	2,41	3600	48	9,6	464

